


**DATA SHEET**

**DD32R-FX**  
**AES/EBU DIGITAL I/O**  
**MODULE**

**OPTICAL DIGITAL**  
**NETWORK DEVICE**

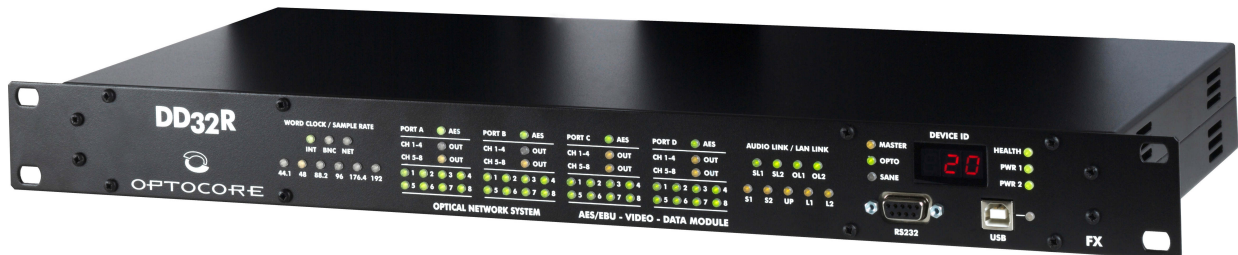

Product Features
▪ <b>32 AES/EBU digital audio channels = 64 channels</b>
▪ <b>Unique switch to use as AES/EBU inputs or outputs.</b>
▪ <b>4 RS485 interfaces for the exchange of control data.</b>
▪ <b>Word clock I/O</b>
▪ <b>2 SANE Ports</b>
▪ <b>2 LAN Ports</b>
▪ <b>Composite video input and output</b>
▪ <b>2 optical 2 Gbps LINK interface with duplex LC-connectors</b>
▪ <b>Dual power supply with automatic switchover</b>
▪ <b>USB, RS232 or LAN port for configuration and control</b>
▪ <b>Full remote access with OPTOCORE CONTROL software</b>
▪ <b>Upgradeable internal logic</b>
▪ <b>Comprehensive status information via LED banks on the front</b>

DD32R-FX is designed to function as a digital interface, wherever AES/EBU ports are required in an OPTOCORE® OPTICAL DIGITAL NETWORK SYSTEM. The 32 principle ports feature the unique possibility to use them as AES/EBU inputs or outputs.

In combination with the other Optocore devices, the DD32R-FX offers a great flexibility to build the network exactly suiting an applications need. In combination with X6R-FX on stage, it is the perfect interface to a digital console. A DD32R-FX on stage can be used as an interface to all microphone preamps with AES3 outputs. The DD32R-FX serves as I/O to the converter units of the X6-series or via Sane to X6R-TP units. With Optocore microphone preamps, the DD32R-FX enables direct gain control of the preamps on stage from most digital consoles, including Yamaha, Digico, Studer, Soundcraft, Lawo, SSL.

Networks with several DD32R-FX and other Optocore devices allow the transport of a huge amount of digital data, e.g. 768 audio channels with a sample rate of 48 kHz, 32 RS485 channels and 3 video channels. Distances from 350/700 m up to 70 km can be covered depending on the fiber optic transceivers.

The dual redundant ring structure of



the OPTOCORE® OPTICAL DIGITAL NETWORK SYSTEM provides maximum safety in a straightforward network with an outstanding low latency. It facilitates the use of the advantages of fiber optical transmission in all sorts of temporary and permanent applications, especially when long distance connections and high-quality audio is required.

The DD32R-FX features word clock I/O, composite video input and output, two LAN Ports and two Sane Ports. Four RS485 ports allow the transport of a wide range of standards such as RS422, DMX and MIDI. The dual power supply unit, with automatic switchover, permits a redundant power supply and safeguards against malfunctions of the unit if one power supply fails to run.

OPTOCORE CONTROL provides easy access to all configuration and control tools.

Due to careful design and using latest technologies, the DD32R-FX fulfills the demand of highest digital standards occupying only one unit of a 19" rack and consuming minimal power. The unique FPGA (field programmable gate array) based concept of the internal logic circuitry permits updating of the hardware via the units remote ports, ensuring a continual state-of-the-art device.

## Line Drawings

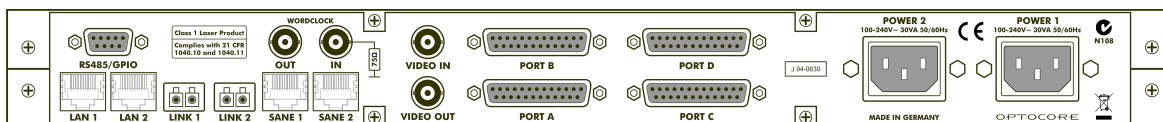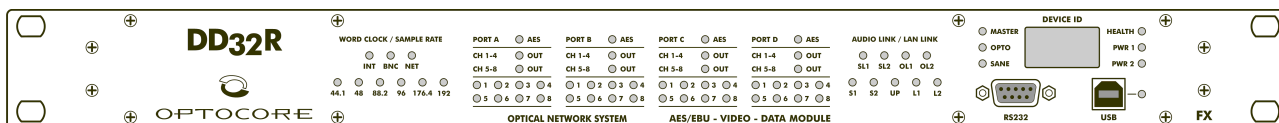

## Technical Specifications

<b>Principal Ports</b>	Convention EIA / TIA-422	
<b>Data channels</b>	Digital data, AES/EBU	32
	AES/EBU audio channels	64
<b>Impedance</b>	Termination	110 Ω
<b>I/O Configuration</b>	Software configureable in 8 channel blocks	64 In / 0 Out to 0 In / 64 Out
<b>Auxiliary Ports</b>	Convention EIA / TIA-485	
<b>Data channels</b>	Digital control data	4
<b>Impedance</b>	Termination	120 Ω
<b>Word Clock</b>	Hardware standard 75 Ω / BNC	
<b>Sample rate</b>		44.1 / 48 / 88.2 / 96 / 176.4 / 192 kHz
<b>Impedance</b>	Input and Output	75 Ω
<b>Video</b>	Hardware standard 75 Ω / BNC	
<b>Channels</b>		1 x input, 1 x output
<b>Format</b>		Composite video
<b>Optical Links</b>	Input, Output, Dual – Full bandwidth	
<b>Connection</b>		Duplex LC
<b>Protocol</b>	Up to 1024 audio channels	Optocore
<b>Transmission</b>		Full duplex
<b>Data rate</b>		2 x 2 Gbps or 2 x 1Gbps
<b>Optical wave guide cable lengths</b>	Multimode fiber 50 μm	≤ 700m @ 1G, ≤ 350m @ 2G
	Monomode fiber 9 μm	up to 70km (on request)
<b>Sane Links</b>	Input, Output, Dual – Full bandwidth	
<b>Connection</b>		RJ45
<b>Protocol</b>	64 audio channels and 100Mbps LAN	Sane
<b>Transmission, data rate</b>		200Mbps, full duplex
<b>Cable length</b>	CAT5, CAT5E, CAT6, CAT7	≤ 100m for error free transmission
<b>LAN Links</b>	Switch function across the entire Optocore and Sane network	
<b>Connection</b>		RJ45
<b>Protocol</b>	10/100Mbps LAN	Ethernet, full duplex, Auto-MDIX
<b>Power Supply</b>	2 independent power supplies with function check and automatic switch-over	
<b>Type</b>	Switch-mode, universal input	
<b>Mains voltage</b>	100 ... 240 V	
<b>Frequency</b>	50 ... 60 Hz	
<b>Power consumption</b>	12 W typical	
<b>Remote Control</b>		
<b>RS232</b>	Convention EIA / TIA-232	RxD, TxD / 57.600 Baud
<b>USB Port</b>		Interface to PC
<b>Dimensions</b>		1 RU / 19"
<b>W x H x D</b>	483 x 44 x 200 mm	19.2 x 1.73 x 7.87 inch
<b>Weight</b>	2.7 kg	6.0 lbs